

DESCRIPTION

- The A-TRACK trim is a superior quality PVC extrusion that ensures proper drainage with Exterior Insulation Finish Systems.

USE

- The A-TRACK trim is used as a starter track at wall terminations or other horizontal junctions to ensure evacuation of water infiltrations behind the wall assembly.
- The A-TRACK trim is used with EPS-GD panels and is suitable for all thicknesses of panels.

INSTALLATION


- The trim must be incorporated in the Hydroflex membrane appropriate to the specifications and substrate used.
- The A-TRACK may also be mechanically attached using corrosion resistant fasteners.
- Please refer to the technical drawings and the specifications of the different systems for additional information.

Color	White
Length	2,44m (8')
Height	76mm (3")
Width	25mm (1")

■ Properties
 ■ Result

APPEARANCE

- White
- Trims may be painted with most exterior grade latex paints. Prior to painting, the trims must be clean, without grease, oil or other bond-inhibiting substances.

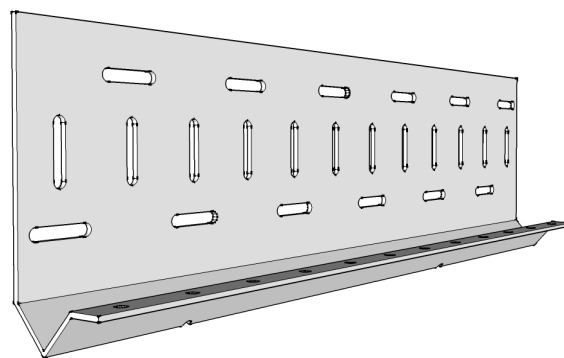

This document contains current information on the product. It is only provided as a guide and is subject to modifications at any time without notice. ADEX Systems Inc. reserves the right to make any modification according to technological progress. Specialised designers, architects, engineers or other professionals that choose to make any use of this information bear the complete responsibility, whatever it be, direct or indirect, that could follow from such use. ADEX Systems Inc. does not bear any responsibility that could give way to damages, defaults, defects, deficiencies, prejudices, loss or decrease of profit, be they direct or indirect, resulting from such use of this information by specialised designers, architects, engineers or other professionals. Please refer to www.adex.ca for the latest version of this document.

September 2018